


REVOLUTIONARY "SURE-BOARD"® SERIES 200S IS THE NON-COMBUSTIBLE FLOOR/ROOF SHEATHING THAT WILL IMPROVE THE FIRE RESISTANCE OF YOUR BUILDING USING STANDARD CONSTRUCTION METHODS AND PRACTICES.

ROOF FRAMING

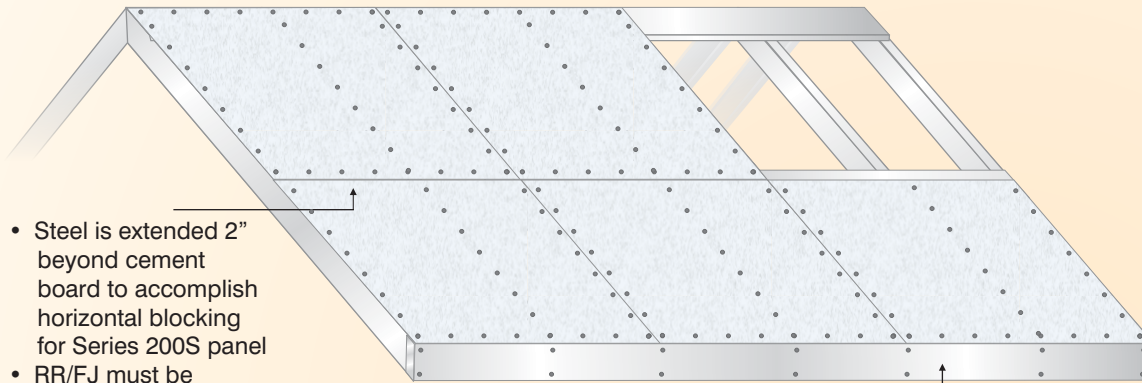

- Steel is extended 2" beyond cement board to accomplish horizontal blocking for Series 200S panel
- RR/FJ must be installed at 24" o.c. maximum

- Joints of Sureboard® Series 200S panels may be installed in straight line if necessary

ADDITIONAL CERTIFICATIONS:

SOUND:

- Improves Sound/Impact Results on Typical CFS Framed Assembly.

FIRE:


- UL Listed Fire Rating using Single Layer of 5/8" Type C Gypsum Test Under ASTM E119 with Applied Load (Assembly yielded over 81 minutes protection.)

SURE-BOARD®
Series 200S
 For Floor/Roof Non-Combustible Sheathing
 U.S. PATENT #7,770,346
 IAPMO ES ER-185 LARR #26040
 DSA IR A-5 LA FAB #2109

SAVINGS TO CONTRACTOR:

- Cost for labor and materials is approximately 20% less than any existing non-combustible sheathing currently available today.
- Panel size is 48" x 48" dimension and can be laid in place by one installer.

FLOOR FRAMING

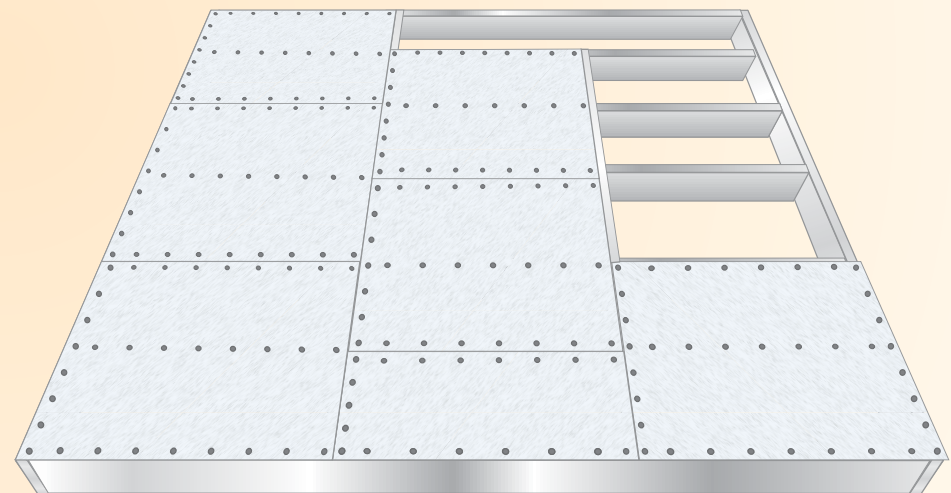

SURE-BOARD® SERIES 200S NON-COMBUSTIBLE SHEATHING WILL IMPROVE THE PERFORMANCE OF YOUR CFS STRUCTURE, WHILE REDUCING THE CONSTRUCTION COSTS TO YOU.

SURE-BOARD® IS A CLEAR WINNER.